



BSX Series (High Performance)

Cushion Tire Lift Trucks • 4,000 - 6,000 lbs. Capacity • 2,500 lbs. Capacity (Turret) • Electric • 36 volt



GENERAL		400SBH	450SBH
Model			
Power Type		Electric (36V)	Electric (36V)
Operation Type		Stand-up	Stand-up
Capacity @ 24-in. (600 mm) load center *	lbs. (kg)	4,000 (1,810)	4,500 (2,040)
Load distance from center axle (2-stage mast)	in. (mm)	11.1 (280)	11.1 (280)
Load distance from center axle (3-stage mast)	in. (mm)	11.8 (300)	11.8 (300)
Wheelbase	in. (mm)	51.3 (1,300)	51.3 (1,300)
WEIGHT			
Service weight (includes min. weight battery, 3-stage std. mast & forks)	lbs. (kg)	9,555 (4,335)	9,915 (4,500)
TIRE			
Tire type		Cushion Solid	Cushion Solid
Tire size, front		16 x 7 x 10 1/2	16 x 7 x 10 1/2
Tire size, rear		10 x 5 x 6 1/2 Double	10 x 5 x 6 1/2 Double
Number of wheel, front / rear	x = driven	2x / 2	2x / 2
Tread (center of tires), front / rear	in. (mm)	35.0 (890) / 5.3 (130)	35.0 (890) / 5.3 (130)
DIMENSIONS			
Tilting angle, 2-stage masts, forward / backward	deg.	3 / 5	3 / 5
Tilting angle, 3-stage masts, forward / backward	deg.	3 / 5	3 / 5
Mast height, lowered (3-stage std. mast)	in. (mm)	83.0 (2,110)	83.0 (2,110)
Mast height, extended (3-stage std. mast) †	in. (mm)	235.8 (5,980)	235.8 (5,980)
Maximum fork height (3-stage std. mast) **	in. (mm)	187.8 (4,760)	187.8 (4,760)
Free lift height (3-stage std. mast)	in. (mm)	35.0 (890)	35.0 (890)
Height overhead guard	in. (mm)	83.0 (2,110)	83.0 (2,110)
Drive In Rack OHG width	in. (mm)	23.8 (605)	23.8 (605)
Length to fork face (2-stage mast)	in. (mm)	70.1 (1,780)	70.1 (1,780)
Length to fork face (3-stage mast)	in. (mm)	70.8 (1,800)	70.8 (1,800)
Overall width, at drive tires	in. (mm)	42.0 (1,065)	42.0 (1,065)
Forks, thickness x width x length	in. (mm)	1.5 x 4.0 x 42.0 (38 x 100 x 1,070)	1.5 x 4.0 x 42.0 (38 x 100 x 1,070)
Carriage width / ITA Class	in. (mm)	37.5 (950) / II	37.5 (950) / II
Ground clearance, under mast	in. (mm)	3.0 (75)	3.0 (75)
Ground clearance, center of wheelbase	in. (mm)	4.0 (100)	4.0 (100)
Right angle stacking aisle (2-stage mast) ††	in. (mm)	70.3 (1,835)	70.3 (1,835)
Right angle stacking aisle (3-stage mast) ††	in. (mm)	71.0 (1,800)	71.0 (1,800)
Turning radius, outside	in. (mm)	59.2 (1,510)	59.2 (1,510)
Battery compartment: width x length x height	in. (mm)	20.7 x 38.8 x 31.5 (525 x 985 x 800)	20.7 x 38.8 x 31.5 (525 x 985 x 800)
PERFORMANCE			
Travel speed, forward, loaded / unloaded	mph (km/h)	8.0 (12.8) / 8.0 (12.8)	8.0 (12.8) / 8.0 (12.8)
Lifting speed, loaded / unloaded (2-stage mast)	fpm (mm/s)	64 (320) / 98 (500)	61 (310) / 98 (500)
Lifting speed, loaded / unloaded (3-stage mast)	fpm (mm/s)	65 (330) / 100 (510)	63 (320) / 100 (510)
Lowering speed, loaded / unloaded (2-stage mast)	fpm (mm/s)	86 (440) / 56 (280)	86 (440) / 56 (280)
Lowering speed, loaded / unloaded (3-stage mast)	fpm (mm/s)	90 (460) / 76 (390)	90 (460) / 76 (390)
Maximum drawbar pull, loaded	lbs. (N)	2,200 (9,800)	2,200 (9,800)
Maximum gradeability, loaded / unloaded at 1 mph	%	15 / 15	15 / 15
Service brake, operation / control		Hand / Electronically Applied	Hand / Electronically Applied
Parking brake, operation / control		Foot / Mechanical	Foot / Mechanical
Steering type		Electric	Electric
DRIVE			
Drive motor, 60 minute rating	HP (kW)	6.4 (4.8) x 2 motors	6.4 (4.8) x 2 motors
Pump motor, 5 minute rating	HP (kW)	12.2 (9.1)	12.2 (9.1)
PS motor, 60 minute rating	HP (kW)	0.5 (0.37)	0.5 (0.37)
Battery voltage	volts	36	36
Battery capacity, minimum	Ah/6 hr. rate	880	880
Battery capacity, maximum	Ah/6 hr. rate	1,240	1,240
Battery weight, minimum	lbs. (kg)	2,700 (1,230)	2,700 (1,230)
Battery weight, maximum	lbs. (kg)	2,900 (1,315)	2,900 (1,315)
OTHER			
Drive motor control		Transistor MOSFET	Transistor MOSFET
Relief pressure, maximum	psi (bar)	2,850 (195)	3,050 (210)
Hydraulic tank capacity	U.S. gallons (liters)	11.0 (42)	11.0 (42)


* Optional masts, attachments, longer load dimensions, and higher lifting heights may result in derating of the capacity. Contact your authorized Tusk dealer.

** Other mast heights available. See MAST DATA chart for other standard mast heights. Contact your authorized Tusk dealer.

† Includes 48-inch (1,220 mm) high load backrest. Contact your authorized Tusk dealer.

†† Add load length and clearance. Contact your authorized Tusk dealer.

NOTE: Most values shown in this publication are rounded. Therefore, direct conversion between metric and English or Imperial may be slightly different from those shown. The performance of machines is affected by the condition of the vehicle and how it is equipped as well as the nature and condition of the operating area. If these specifications are critical or if your needs exceed the specifications shown here, discuss the proposed application with your authorized Tusk dealer.

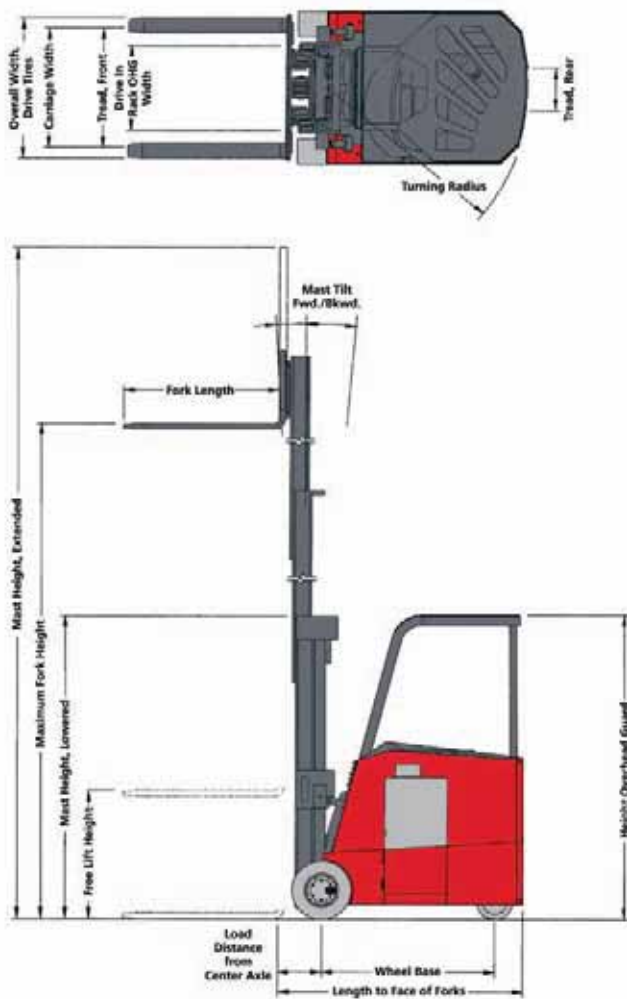

Mast Data

Maximum Fork Height in. (mm)	Mast Height [†]		Free Lift [†] in. (mm)
	Lowered in. (mm)	Extended [†] in. (mm)	
400 / 450SBH			
2-STAGE FREE VIEW (FV)			
105.0 (2,665)	71.0 (1,805)	153.0 (1,890)	9.5 (240)
117.0 (2,970)	77.0 (1,955)	165.0 (4,190)	9.5 (240)
129.0 (3,275)	83.0 (2,110)	177.0 (4,495)	9.5 (240)
140.0 (3,555)	89.0 (2,260)	188.0 (4,775)	9.5 (240)
151.0 (3,835)	95.0 (2,415)	199.0 (5,055)	9.5 (240)
2-STAGE FULL FREE VIEW (FFV)			
104.0 (2,640)	71.0 (1,805)	152.0 (3,861)	23.0 (585)
116.0 (2,945)	77.0 (1,955)	164.0 (4,166)	29.0 (735)
128.0 (3,250)	83.0 (2,110)	176.0 (4,470)	35.0 (890)
139.0 (3,530)	89.0 (2,260)	187.0 (4,750)	41.0 (1,040)
150.0 (3,810)	95.0 (2,415)	198.0 (5,029)	47.0 (1,195)
3-STAGE FULL FREE VIEW (TFV)			
151.8 (3,855)	71.0 (1,805)	199.8 (5,075)	23.0 (585)
169.8 (4,310)	77.0 (1,955)	217.8 (5,530)	29.0 (735)
187.8 (4,770)	83.0 (2,110)	235.8 (5,990)	35.0 (890)
203.8 (5,175)	89.0 (2,260)	251.8 (6,400)	41.0 (1,040)
217.8 (5,530)	95.0 (2,415)	265.8 (6,750)	47.0 (1,195)
231.8 (5,885)	101.0 (2,565)	279.8 (7,110)	53.0 (1,345)
243.8 (6,190)	107.0 (2,715)	291.8 (7,410)	59.0 (1,500)
255.8 (6,495)	113.0 (2,870)	303.8 (7,715)	65.0 (1,650)
*267.8 (6,800)	119.0 (3,025)	315.8 (8,020)	71.0 (1,800)
4-STAGE FULL FREE VIEW (QFV)			
*198.6 (5,040)	71.0 (1,805)	246.6 (6,265)	23.0 (585)
*222.6 (5,650)	77.0 (1,955)	270.6 (6,875)	29.0 (735)
*240.6 (6,110)	83.0 (2,110)	288.6 (7,330)	35.0 (890)
*258.6 (6,565)	89.0 (2,260)	306.6 (7,790)	41.0 (1,040)
*276.6 (7,025)	95.0 (2,415)	324.6 (8,245)	47.0 (1,195)

*Requires wide tread option.

Tusk, The Smart Buy...

...our commitment to focusing energies and resources around building an internal support system capable of allowing our dealers and customers a hassle-free environment in which to grow their businesses.

SPECIAL FEATURES

- ✓ Powerful 7.2" drive motor with MOSFET Controller Contactorless Technology for top level performance and low maintenance.
- ✓ Dual-front, continuous drive differential.
- ✓ The hand controls feature contoured grips for effortless control of lift, speed, and steering functions.
- ✓ Low 7" step for easier on and off.
- ✓ Convenient, lightweight cover provides fast access to power steering and hydraulic motors and pumps.

STANDARD EQUIPMENT

- ✓ Overhead Guard
- ✓ MOSFET Controller
- ✓ Self Diagnostic Start-Up
- ✓ Idle Timer Auto Power Down
- ✓ Field Weakening
- ✓ Three-Way Hydraulic Control Valve
- ✓ Full Electric Power Steering (FEPS)
- ✓ Multi-Function Hydraulic / Drive Control Handle
- ✓ Dual Disc Parking Brake
- ✓ Headlights OHG Mounted
- ✓ Horn
- ✓ Cushion Floor Pad

- ✓ Operator Hip Cushioning
- ✓ Battery Restraint and Roller System
- ✓ Battery Discharge Indicator (BDI) with Lift Interrupt

OPTIONAL EQUIPMENT

- Additional Height OHGs
- Additional Length Forks
- Attachments
- Auxiliary Hydraulic Valve
- Cold/Freezer Protection
- Internal Hydraulic Hosing
- Warning Devices – Audible
- Warning Devices – Visual

Contact your authorized Tusk dealer for other options.

GENERAL		500SBH	550SBH
Model			
Power Type		Electric (36V)	Electric (36V)
Operation Type		Stand-up	Stand-up
Capacity @ 24-in. (600 mm) load center *	lbs. (kg)	5,000 (2,270)	5,500 (2,500)
Load distance from center axle (2-stage mast)	in. (mm)	11.8 (300)	11.8 (300)
Load distance from center axle (3-stage mast)	in. (mm)	12.8 (325)	12.8 (325)
Wheelbase	in. (mm)	55.8 (1,415)	55.8 (1,415)
WEIGHT			
Service weight (includes min. weight battery, 3-stage std. mast & forks)	lbs. (kg)	10,365 (4,700)	10,700 (4,850)
TIRE			
Tire type		Cushion Solid	Cushion Solid
Tire size, front		16 x 7 x 10 1/2	16 x 7 x 10 1/2
Tire size, rear		10 x 5 x 6 1/2 Double	10 x 5 x 6 1/2 Double
Number of wheel, front / rear	x = driven	2x / 2	2x / 2
Tread (center of tires), front / rear	in. (mm)	35.0 (890) / 5.3 (130)	35.0 (890) / 5.3 (130)
DIMENSIONS			
Tilting angle, 2-stage masts, forward / backward	deg.	3/5	3/5
Tilting angle, 3-stage masts, forward / backward	deg.	3/5	3/5
Mast height, lowered (3-stage std. mast)	in. (mm)	83.0 (2,110)	83.0 (2,110)
Mast height, extended (3-stage std. mast) †	in. (mm)	233.8 (5,930)	233.8 (5,930)
Maximum fork height (3-stage std. mast) **	in. (mm)	185.8 (4,720)	185.8 (4,720)
Free lift height (3-stage std. mast)	in. (mm)	35.0 (890)	35.0 (890)
Height overhead guard	in. (mm)	83.0 (2,110)	83.0 (2,110)
Drive In Rack OHG width	in. (mm)	23.8 (605)	23.8 (605)
Length to fork face (2-stage mast)	in. (mm)	75.3 (1,910)	77.1 (1,960)
Length to fork face (3-stage mast)	in. (mm)	76.3 (1,940)	78.1 (1,985)
Overall width, at drive tires	in. (mm)	42.0 (1,065)	42.0 (1,065)
Forks, thickness x width x length	in. (mm)	1.5 x 4.0 x 42.0 (38 x 100 x 1,070)	1.5 x 4.0 x 42.0 (38 x 100 x 1,070)
Carriage width / ITA Class	in. (mm)	37.5 (950) / II	37.5 (950) / II
Ground clearance, under mast	in. (mm)	3.0 (75)	3.0 (75)
Ground clearance, center of wheelbase	in. (mm)	4.0 (100)	4.0 (100)
Right angle stacking aisle (2-stage mast) ††	in. (mm)	75.5 (1,920)	77.8 (1,975)
Right angle stacking aisle (3-stage mast) ††	in. (mm)	76.5 (1,950)	78.8 (2,000)
Turning radius, outside	in. (mm)	63.7 (1,620)	66.0 (1,680)
Battery compartment: width x length x height	in. (mm)	20.7 x 38.8 x 31.5 (525 x 985 x 800)	20.7 x 38.8 x 31.5 (525 x 985 x 800)
PERFORMANCE			
Travel speed, forward, loaded / unloaded	mph (km/h)	7.0 (11.3) / 7.0 (11.3)	7.0 (11.3) / 7.0 (11.3)
Lifting speed, loaded / unloaded (2-stage mast)	fpm (mm/s)	58 (300) / 96 (490)	55 (280) / 96 (490)
Lifting speed, loaded / unloaded (3-stage mast)	fpm (mm/s)	55 (280) / 100 (510)	51 (260) / 100 (510)
Lowering speed, loaded / unloaded (2-stage mast)	fpm (mm/s)	86 (440) / 56 (280)	86 (440) / 56 (280)
Lowering speed, loaded / unloaded (3-stage mast)	fpm (mm/s)	90 (460) / 76 (390)	90 (460) / 76 (390)
Maximum drawbar pull, loaded	lbs. (N)	2,500 (11,120)	2,500 (11,120)
Maximum gradeability, loaded / unloaded at 1 mph	%	15 / 15	10 / 10
Service brake, operation / control		Hand / Electronically Applied	Hand / Electronically Applied
Parking brake, operation / control		Foot / Mechanical	Foot / Mechanical
Steering type		Electric	Electric
DRIVE			
Drive motor, 60 minute rating	HP (kW)	7.6 (5.7) x 2 motors	7.6 (5.7) x 2 motors
Pump motor, 5 minute rating	HP (kW)	12.2 (9.1)	12.2 (9.1)
PS motor, 60 minute rating	HP (kW)	0.5 (0.37)	0.5 (0.37)
Battery voltage	volts	36	36
Battery capacity, minimum	Ah/6 hr. rate	880	880
Battery capacity, maximum	Ah/6 hr. rate	1,240	1,240
Battery weight, minimum	lbs. (kg)	2,700 (1,230)	2,700 (1,230)
Battery weight, maximum	lbs. (kg)	2,900 (1,315)	2,900 (1,315)
OTHER			
Drive motor control		Transistor MOSFET	Transistor MOSFET
Relief pressure, maximum	psi (bar)	3,350 (230)	3,550 (245)
Hydraulic tank capacity	U.S. gallons (liters)	11.0 (42)	11.0 (42)

* Optional masts, attachments, longer load dimensions, and higher lifting heights may result in derating of the capacity. Contact your authorized Tusk dealer.


** Other mast heights available. See MAST DATA chart for other standard mast heights. Contact your authorized Tusk dealer.

† Includes 48-inch (1,220 mm) high load backrest. Contact your authorized Tusk dealer.

†† Add load length and clearance. Contact your authorized Tusk dealer.

NOTE: Most values shown in this publication are rounded. Therefore, direct conversion between metric and English or Imperial may be slightly different from those shown. The performance of machines is affected by the condition of the vehicle and how it is equipped as well as the nature and condition of the operating area. If these specifications are critical or if your needs exceed the specifications shown here, discuss the proposed application with your authorized Tusk dealer.

Mast Data

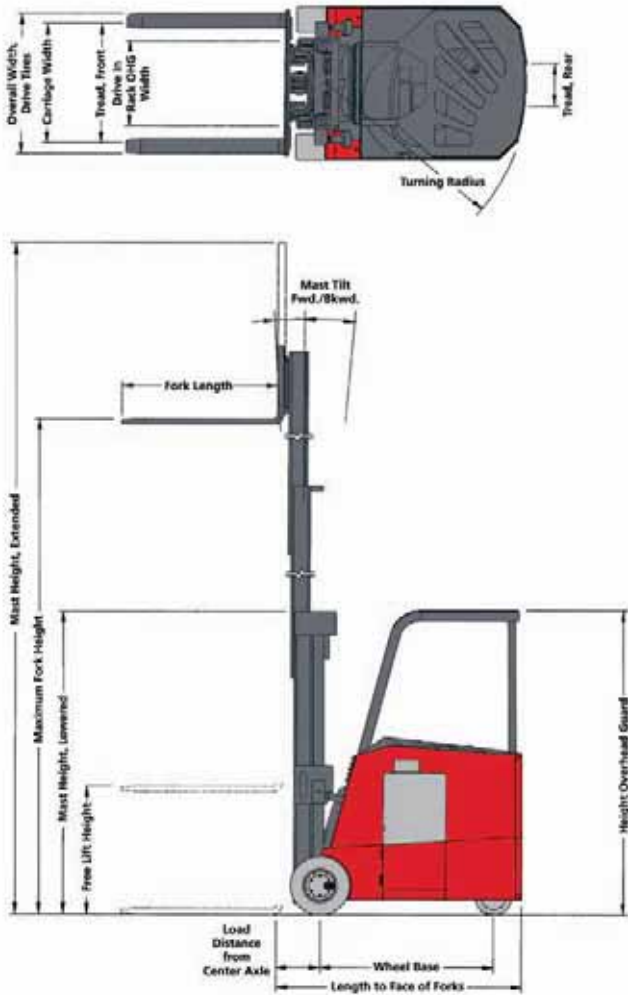

Maximum Fork Height in. (mm)	Mast Height [†]		Free Lift [†] in. (mm)
	Lowered in. (mm)	Extended [†] in. (mm)	
500/550SBH			
2-STAGE FREE VIEW (FV)			
103.5 (2,635)	71.0 (1,805)	151.5 (3,850)	9.5 (240)
115.5 (2,940)	77.0 (1,955)	163.5 (4,155)	9.5 (240)
127.5 (3,245)	83.0 (2,110)	175.5 (4,460)	9.5 (240)
138.5 (3,525)	89.0 (2,260)	186.5 (4,740)	9.5 (240)
149.5 (3,805)	95.0 (2,415)	197.5 (5,020)	9.5 (240)
2-STAGE FULL FREE VIEW (FFV)			
103.0 (2,615)	71.0 (1,805)	151.0 (3,835)	23.0 (585)
115.0 (2,920)	77.0 (1,955)	163.0 (4,140)	29.0 (735)
127.0 (3,225)	83.0 (2,110)	175.0 (4,445)	35.0 (890)
138.0 (3,505)	89.0 (2,260)	186.0 (4,725)	41.0 (1,040)
149.0 (3,785)	95.0 (2,415)	197.0 (5,000)	47.0 (1,195)
3-STAGE FULL FREE VIEW (TFV)			
149.8 (3,805)	71.0 (1,805)	197.8 (5,025)	23.0 (585)
167.8 (4,260)	77.0 (1,955)	215.8 (5,475)	29.0 (735)
185.8 (4,720)	83.0 (2,110)	233.8 (5,930)	35.0 (890)
201.8 (5,126)	89.0 (2,260)	249.8 (6,340)	41.0 (1,040)
215.8 (5,480)	95.0 (2,415)	263.8 (6,695)	47.0 (1,195)
229.8 (5,835)	101.0 (2,565)	277.8 (7,050)	53.0 (1,345)
241.8 (6,140)	107.0 (2,715)	289.8 (7,355)	59.0 (1,500)
253.8 (6,445)	113.0 (2,870)	301.8 (7,660)	65.0 (1,650)
*265.8 (6,750)	119.0 (3,025)	313.8 (7,965)	71.0 (1,800)
*283.8 (7,205)	125.0 (3,185)	331.8 (8,430)	77.0 (1,955)
4-STAGE FULL FREE VIEW (QFV)*			
*195.6 (4,965)	71.0 (1,805)	243.6 (6,185)	23.0 (585)
*219.6 (5,575)	77.0 (1,955)	267.6 (6,795)	29.0 (735)
*237.6 (6,030)	83.0 (2,110)	285.6 (7,250)	35.0 (890)
*255.6 (6,490)	89.0 (2,260)	303.6 (7,710)	41.0 (1,040)
*273.6 (6,950)	95.0 (2,415)	321.6 (8,170)	47.0 (1,195)
*291.6 (7,405)	101.0 (2,565)	339.6 (8,625)	53.0 (1,345)

*Requires wide tread option.

Tusk, The Smart Buy...

...our commitment to focusing energies and resources around building an internal support system capable of allowing our dealers and customers a hassle-free environment in which to grow their businesses.

SPECIAL FEATURES

- ✓ Powerful 8.0" drive motor with MOSFET Controller Contactorless Technology for top level performance and low maintenance.
- ✓ Dual-front, continuous drive differential.
- ✓ The hand controls feature contoured grips for effortless control of lift, speed, and steering functions.
- ✓ Low 7" step for easier on and off.
- ✓ Convenient, lightweight cover provides fast access to power steering and hydraulic motors and pumps.

STANDARD EQUIPMENT

- ✓ Overhead Guard
- ✓ MOSFET Controller
- ✓ Self Diagnostic Start-Up
- ✓ Idle Timer Auto Power Down
- ✓ Field Weakening
- ✓ Three-Way Hydraulic Control Valve
- ✓ Full Electric Power Steering (FEPS)
- ✓ Multi-Function Hydraulic / Drive Control Handle
- ✓ Dual Disc Parking Brake
- ✓ Headlights OHG Mounted
- ✓ Horn
- ✓ Cushion Floor Pad

- ✓ Operator Hip Cushioning
- ✓ Battery Restraint and Roller System
- ✓ Battery Discharge Indicator (BDI) with Lift Interrupt

OPTIONAL EQUIPMENT

- Additional Height OHGs
- Additional Length Forks
- Attachments
- Auxiliary Hydraulic Valve
- Cold/Freezer Protection
- Internal Hydraulic Hosing
- Warning Devices – Audible
- Warning Devices – Visual

Contact your authorized Tusk dealer for other options.

GENERAL			
Model		600SBH	250SBT
Power Type		Electric (36V)	Electric (36V)
Operation Type		Stand-up	Stand-up (Turret)
Capacity @ 24-in. (600 mm) load center *	lbs. (kg)	6,000 (2,720)	2,500 (1,135)
Load distance from center axle (2-stage mast)	in. (mm)	12.0 (305)	N/A
Load distance from center axle (3-stage mast)	in. (mm)	13.0 (330)	49.0 (2,245)
Wheelbase	in. (mm)	55.8 (1,415)	55.8 (1,415)
WEIGHT			
Service weight (includes min. weight battery, 3-stage std. mast & forks)	lbs. (kg)	11,400 (5,170)	13,300 (6,030)
TIRE			
Tire type		Cushion Solid	Cushion Solid
Tire size, front		16 x 5 x 10 1/2 Dual	16 x 5 x 10 1/2 Dual
Tire size, rear		10 x 5 x 6 1/2 Double	10 x 5 x 6 1/2 Double
Number of wheel, front / rear	x = driven	4x / 2	4x / 2
Tread (center of tires), front / rear	in. (mm)	42.6 (1,080) / 5.3 (130)	42.6 (1,080) / 5.3 (130)
DIMENSIONS			
Tilting angle, 2-stage masts, forward / backward	deg.	3 / 5	N/A
Tilting angle, 3-stage masts, forward / backward	deg.	3 / 5	0 / 0
Mast height, lowered (3-stage std. mast)	in. (mm)	83.0 (2,110)	83.0 (2,110)
Mast height, extended (3-stage std. mast) †	in. (mm)	229.4 (5,830)	173.2 (4,400)
Maximum fork height (3-stage std. mast) **	in. (mm)	181.4 (4,610)	133.2 (3,385)
Free lift height (3-stage std. mast)	in. (mm)	35.0 (890)	43.0 (1,090)
Height overhead guard	in. (mm)	83.0 (2,110)	83.0 (2,110)
Drive In Rack OHG width	in. (mm)	23.8 (605)	23.8 (605)
Length to fork face (2-stage mast)	in. (mm)	77.3 (1,965)	N/A
Length to fork face (3-stage mast)	in. (mm)	78.3 (1,990)	114.3 (2,900)
Overall width, at drive tires	in. (mm)	52.6 (1,335)	52.7 (1,340)
Forks, thickness x width x length	in. (mm)	1.5 x 5.0 x 42.0 (38 x 125 x 1,070)	1.7 x 4.0 x 42.0 (45 x 100 x 1,070)
Carriage width / ITA Class	in. (mm)	37.5 (950) / III	37.5 (950) / II
Ground clearance, under mast	in. (mm)	3.0 (75)	3.0 (75)
Ground clearance, center of wheelbase	in. (mm)	4.0 (100)	4.0 (100)
Right angle stacking aisle (2-stage mast) ††	in. (mm)	78.0 (1,980)	N/A
Right angle stacking aisle (3-stage mast) ††	in. (mm)	79.0 (2,010)	N/A
Turning radius, outside	in. (mm)	66.0 (1,680)	66.0 (1,680)
Battery compartment: width x length x height	in. (mm)	20.7 x 38.8 x 31.5 (525 x 985 x 800)	20.7 x 38.8 x 31.5 (525 x 985 x 800)
PERFORMANCE			
Travel speed, forward, loaded / unloaded	mph (km/h)	7.0 (11.3) / 7.0 (11.3)	7.0 (11.3) / 7.0 (11.3)
Lifting speed, loaded / unloaded (2-stage mast)	fpm (mm/s)	48 (240) / 92 (470)	N/A
Lifting speed, loaded / unloaded (3-stage mast)	fpm (mm/s)	41 (210) / 90 (460)	65 (330) / 90 (460)
Lowering speed, loaded / unloaded (2-stage mast)	fpm (mm/s)	86 (440) / 56 (280)	N/A
Lowering speed, loaded / unloaded (3-stage mast)	fpm (mm/s)	90 (460) / 76 (390)	90 (460) / 76 (390)
Maximum drawbar pull, loaded	lbs. (N)	2,500 (11,120)	2,500 (11,120)
Maximum gradeability, loaded / unloaded at 1 mph	%	10 / 10	10 / 10
Service brake, operation / control		Hand / Electronically Applied	Hand / Electronically Applied
Parking brake, operation / control		Foot / Mechanical	Foot / Mechanical
Steering type		Electric	Electric
DRIVE			
Drive motor, 60 minute rating	HP (kW)	7.6 (5.7) x 2 motors	7.6 (5.7) x 2 motors
Pump motor, 5 minute rating	HP (kW)	12.2 (9.1)	12.2 (9.1)
PS motor, 60 minute rating	HP (kW)	0.5 (0.37)	0.5 (0.37)
Battery voltage	volts	36	36
Battery capacity, minimum	Ah/6 hr. rate	880	880
Battery capacity, maximum	Ah/6 hr. rate	1,240	1,240
Battery weight, minimum	lbs. (kg)	2,800 (1,270)	2,800 (1,270)
Battery weight, maximum	lbs. (kg)	2,900 (1,315)	2,900 (1,315)
OTHER			
Drive motor control		Transistor MOSFET	Transistor MOSFET
Relief pressure, maximum	psi (bar)	3,760 (260)	2,750 (190)
Hydraulic tank capacity	U.S. gallons (liters)	11.0 (42)	11.0 (42)

* Optional masts, attachments, longer load dimensions, and higher lifting heights may result in derating of the capacity. Contact your authorized Tusk dealer.


** Other mast heights available. See MAST DATA chart for other standard mast heights. Contact your authorized Tusk dealer.

† Includes 48-inch (1,220 mm), except 250SBT Turret, high load backrest. Contact your authorized Tusk dealer.

†† Add load length and clearance. Contact your authorized Tusk dealer.

NOTE: Most values shown in this publication are rounded. Therefore, direct conversion between metric and English or Imperial may be slightly different from those shown. The performance of machines is affected by the condition of the vehicle and how it is equipped as well as the nature and condition of the operating area. If these specifications are critical or if your needs exceed the specifications shown here, discuss the proposed application with your authorized Tusk dealer.

Mast Data

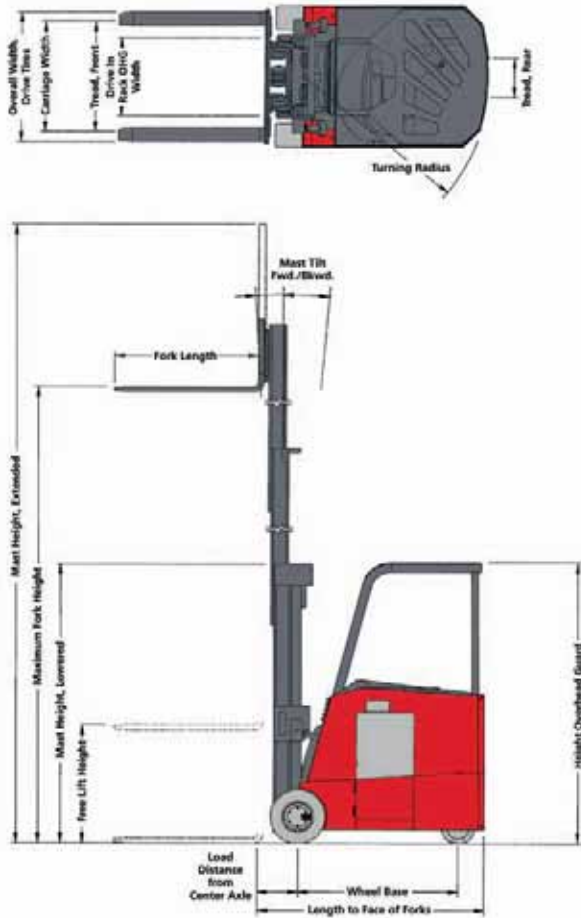

Maximum Fork Height in. (mm)	Mast Height [†]		Free Lift [†] in. (mm)
	Lowered in. (mm)	Extended [†] in. (mm)	

600SBH

2-STAGE FREE VIEW (FV)


94.6 (2,400)	71.0 (1,805)	142.6 (3,625)	9.5 (240)
106.6 (2,705)	77.0 (1,955)	154.6 (3,925)	9.5 (240)
118.6 (3,010)	83.0 (2,110)	166.6 (4,230)	9.5 (240)
129.6 (3,290)	89.0 (2,260)	177.6 (4,510)	9.5 (240)
140.6 (3,570)	95.0 (2,415)	188.6 (4,790)	9.5 (240)

3-STAGE FULL FREE VIEW (TFV)

145.4 (3,640)	71.0 (1,805)	193.4 (4,915)	23.0 (585)
163.4 (4,090)	77.0 (1,955)	211.4 (5,370)	29.0 (735)
181.4 (4,540)	83.0 (2,110)	229.4 (5,825)	35.0 (890)
197.4 (4,940)	89.0 (2,260)	245.4 (6,235)	41.0 (1,040)
211.4 (5,290)	95.0 (2,415)	259.4 (6,590)	47.0 (1,195)
225.4 (5,645)	101.0 (2,565)	273.4 (6,945)	53.0 (1,345)
237.4 (5,945)	107.0 (2,715)	285.4 (7,250)	59.0 (1,500)
249.4 (6,245)	113.0 (2,870)	297.4 (7,555)	65.0 (1,650)

4-STAGE FULL FREE VIEW (QFV)

191.3 (4,790)	71.0 (1,805)	239.3 (6,080)	23.0 (585)
215.3 (5,390)	77.0 (1,955)	263.3 (6,690)	29.0 (735)
233.3 (5,840)	83.0 (2,110)	281.3 (7,145)	35.0 (890)
251.3 (6,290)	89.0 (2,260)	299.3 (7,600)	41.0 (1,040)

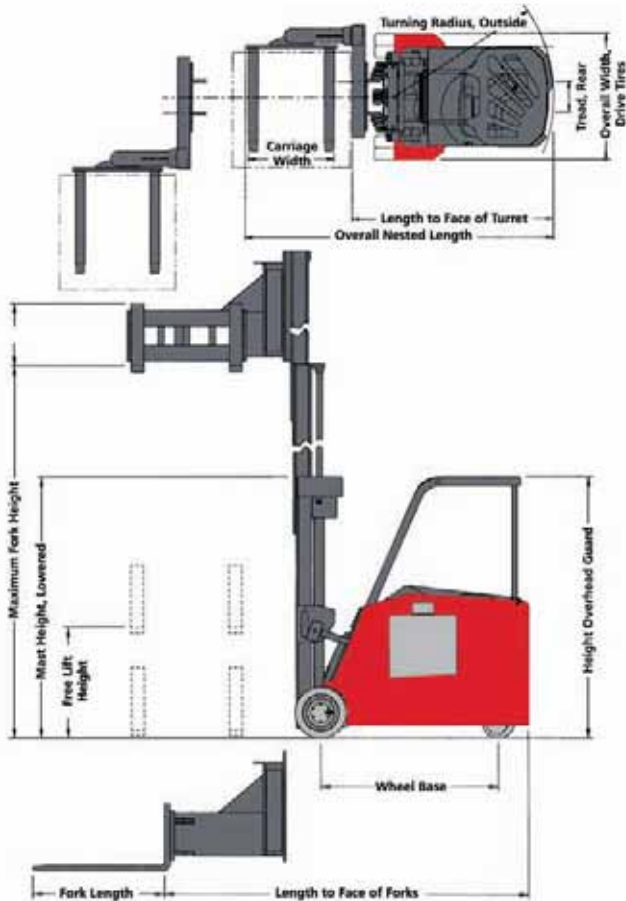

Maximum Fork Height in. (mm)	Mast Height [†]		Free Lift [†] in. (mm)
	Lowered in. (mm)	Extended [†] in. (mm)	

250SBT

3-STAGE FULL FREE VIEW (TFV)

133.2 (3,385)	83.0 (2,110)	173.2 (4,400)	43.0 (1,090)
144.2 (3,665)	89.0 (2,260)	184.2 (4,680)	49.0 (1,245)
155.2 (3,940)	95.0 (2,415)	195.2 (4,955)	55.0 (1,395)
166.2 (4,220)	101.0 (2,565)	206.2 (5,235)	61.0 (1,550)
177.2 (4,500)	107.0 (2,715)	217.2 (5,515)	67.0 (1,700)
188.2 (4,780)	113.0 (2,870)	228.2 (5,795)	73.0 (1,855)
199.2 (5,060)	119.0 (3,020)	239.2 (6,075)	79.0 (2,005)

4-STAGE FULL FREE VIEW (QFV)

168.7 (4,285)	83.0 (2,110)	208.7 (5,300)	43.0 (1,090)
183.7 (4,665)	89.0 (2,260)	223.7 (5,680)	49.0 (1,245)
198.7 (5,050)	95.0 (2,415)	238.7 (6,065)	55.0 (1,395)
213.7 (5,430)	101.0 (2,565)	253.7 (6,445)	61.0 (1,550)
228.7 (5,810)	107.0 (2,715)	268.7 (6,825)	67.0 (1,700)
239.2 (6,075)	113.0 (2,870)	279.2 (7,090)	73.0 (1,855)
252.2 (6,405)	119.0 (3,020)	292.2 (7,420)	79.0 (2,005)

Refer to 500/550SBH model for:

- **Special Features**
- **Standard Equipment**
- **Optional Equipment**

Technical Descriptions

MOTORS

Drive Motors: Dual 36 volt, separately-excited DC motors provide individual drive tire control for exceptional traction and turning and optimal performance. Vertically mounted, 7.2" diameter, 5.5 HP (4.1 kW) on the 4,000 lb. - 4,500 lb. models. Vertically mounted 8.0" diameter, 7.6 HP (5.7 kW) on the 5,000 lb. - 6,000 lb. models and 2,500 lb. turret model.

The drive motors have overheat protection for the highest level of thermal protection available, further increasing the motor life. Armature shafts are mounted on dual tapered roller bearings to support the weight and maintain proper pinion gear alignment further extending motor life and reducing maintenance requirements.

Hydraulic Pump Motor: 36 volt, 7.2" diameter, series wound DC motor with easy to replace brushes and springs.

Power Steering Motor: 36 volt, 5.6" diameter, permanent magnet DC motor.

ELECTRICAL SYSTEM

Independent MOSFET (Metal Oxide Semi-conductor, Field-Effect Transistor) drive motor controllers provide maximum control of the separately-excited motors. Feedback monitors regulate motor control through all operations giving precise control to the operator with ramp start, anti-rollback. During turns, the inside motor is reduced in speed or reversed, as necessary, for precise traction control.

- 36 volt system with an automatic power-on, self-test of all major electrical system components.
- Proportional solenoid valves in the hydraulic system regulate lift and lower speeds.
- Programmable auto-shutdown timeout function helps prevent accidental activation of the truck.
- Console mounted battery state-of-charge indicator and low voltage lift lockout.
- Quick disconnect lever mechanically separates battery connector with easy, low effort action. SB-350 gray battery connector.
- Static discharge grounding strap reduces static charge build-up on truck chassis while driving, keeping the truck frame at neutral electrical potential.
- Password protected access to programming, calibration and diagnostics without the need for external equipment.
- Programmable performance and options: reverse steering, lift interrupt, lift/lower speed.

HYDRAULIC SYSTEM

The hydraulic system features a fully filtered hydraulic reservoir with return oil filter and filtered breather cap.

- High-capacity gear pump mounted directly to series wound motor.
- Pressure check port; proportional solenoid valve controls, velocity fuse flow control devices.
- Hydraulically cushioned lift cylinders to provide smooth transition from freelif to staging during lifting and lowering.

FRAME

Rear entry or side entry chassis of welded steel construction for exceptional rigidity and durability.

- Low, 7" step height with 1.0" lip around floor edge to help prevent operator's foot from slipping out.
- Tapered right sidewall for added protection and security.
- Side rollout battery compartment with lift out gates and zinc dichromate plated steel battery rollers for increased corrosion resistance and long life. Battery roller level is 6.8" above floor level.

DRIVE TRAIN

Dual front, independent drive units with double-reduction gear system. All shafts are mounted on tapered roller bearings. The drive train offers exceptional torque and low speed control for optimum traction on uneven floors with individual wheel traction control during cornering for a confident feel and reduced tire wear.

- Large diameter drive tires for a smoother ride, better traction and load cushioning.

BRAKES

Normal travel braking is accomplished through the drive system with electronic plugging control by reversing the travel control.

The parking brake, which may also be used as an emergency brake, consists of a disc brake system mounted on each drive motor for durability and superior performance. Dual braking plates engage mechanically when the operator lifts their foot from the brake pedal.

- Minimum effort required to depress brake release pedal and activate hydraulic brake release.
- Easy to service with minimal maintenance requirements.
- Floor-mounted brake release pedal is covered with non-slip rubber pad.

POWER STEERING

Electric power steering with 180 degrees steering range for precise control with quiet, responsive operation.

MAST, CARRIAGE, LBR AND FORKS

The high-visibility design mast is equipped with sealed bearing rollers for extended life. Rollers are mounted at an angle and are shim adjustable to provide side thrust control. The high-visibility mast is designed to provide the operator with the clearest unobstructed view possible.

The standard Class II carriage (Class III on 6,000 lb. truck) has six load rollers with sealed side thrust rollers. A 48" high load backrest is standard to help stabilize the load (except VNS25BSXH).

Single and double hydraulic functions with internal hose reeving is available on most mast configurations for operating the optional integral sideshifter and other attachments. Some masts require external hose reels.

OPERATOR COMPARTMENT

The stand up rider compartment is ergonomically designed to give the operator maximum visibility in order to optimize productivity and improve safe operation.

The comfortably contoured operator compartment with spacious foot room and standing area features a non-slip rubber cushioned floor mat and rubber padded brake release pedal.

The instrument display is easy to read and informs the operator of battery state of charge, steer wheel position, multiple hour meters, overload condition, overheat and maintenance indicators, and real-time fault codes.

The single handle, simultaneous multifunction control has been logically formatted for intuitive operation and continuous ease of use.

- Low effort emergency battery disconnect.
- Low, 7" step height.
- 1.5" thick cushion floor mat for reduced standing fatigue and exceptional shock and vibration dampening.
- High visibility, three-stage full freelif mast.
- 3-post overhead guard design with drive-in rack capabilities and fanned lattice design for improved visibility.

SERVICEABILITY

A startup diagnostic system with power on, self test checks all major electrical components prior to allowing the unit to be operated.

The electronic control system with built-in analyzer, self-diagnostics and programmability is engineered with input/output control feedback for specific fault detection and superior diagnostics. No external instrumentation is required.

Easily removed, lift-off panels provide clear access to the lift pump and motor, drive motors, power steering assembly and all electronic components.

COMPLIANCE AND APPROVALS

Meets or exceeds American National Standards Institute, ASME B56.1 – Part III Safety Standards for Powered Industrial Trucks.

Classified by Underwriter's Laboratories. Contact your authorized Tusk dealer for application specifics.



14481 Lochridge Blvd., Covington, GA 30014

Tel: 1-800-980-TUSK (1-800-980-8875) Fax: 770-784-0700

www.tusklifttrucks.com

© Copyright Tusk Lift Trucks 2005. All rights reserved. Tusk, Tusk Lift Trucks, the Tusk mark, and UltraVizion are registered trademarks of Tusk Lift Trucks and its affiliates. Tusk products and specifications are subject to continuous improvement and change without prior notice. The illustrations do not necessarily show the standard version and features of the equipment. The actual operating conditions, including equipment configuration, may affect visibility, performance and/or specifications and may suggest the use of certain options, attachments or special operating procedures. Please consult your authorized Tusk Dealer for specifications and availability. Only those products made in the Covington, GA plant are built under ISO 9001 guidelines. Printed in the USA.

TUSKSSBSXHP rev.01/08